



Série FA /FB

Détecteur niveau liquide Cable Float Level Switch



www.direct-mesure.fr



PRODUCT INTRODUCTION

DESCRIPTION

The Float Level Switch is made from chemical resistant polypropylene. It is durable, low-cost, and specially designed to assist with long range and multiple point level detection in liquids. It is also suitable for tanks containing pumps and granular solutions.

APPLICATION

FAC: Suitable for pump controlled systems

FAR/ P / D/ E: Suitable for pump controlled waste water with a low Specific Gravity (SG level).

FAS: High temperature solutions

FAL/ J: Cleaner water, and installation with smaller process connections.


It is suggested to apply Reed Switch contact models in PLC or DCS control.

WORKING PRINCIPLE

The Cable Float Level Switch is structured by using either micro switches proximity switches or reed switches to control the contact. Its user-friendly design is ideal for level measurement. The switches will transmit an ON or OFF contact signal output when the float rises and turns upwards. The switch contains a metal ball that can slide as the float position changes.

For different water or solution temperatures, different float materials are available for selection. Plastic and stainless steel switches are the most common.

The cable float level switch can not only be used in clear liquids but also can be used in granular liquids. Long distance detection points and multi-point contacts are also available. Cable float level switches can be applied in all water management, petrochemical, chemical industries. Other uses include: air-conditioner systems, drainage systems, most tanks or containers with level switch requirements.

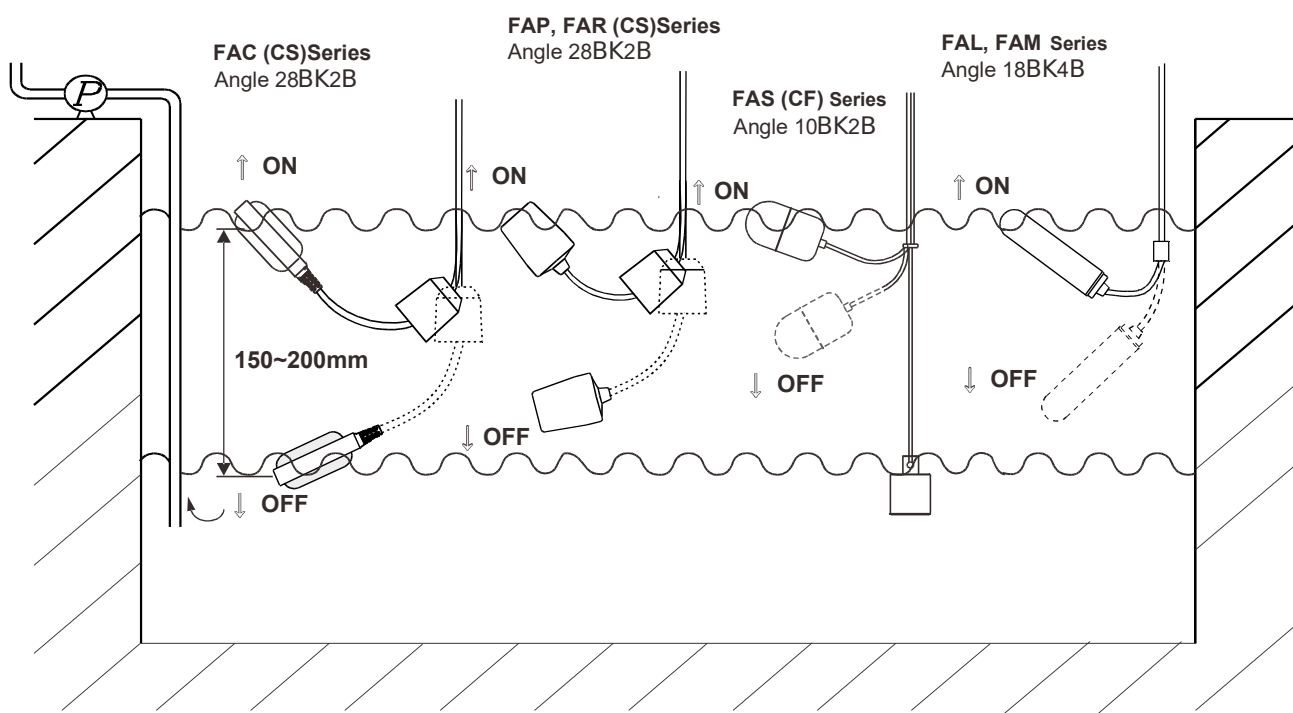

TELEMETRIX est distributeur officiel **FINETEK** leader mondial de la mesure de niveau

TELEMETRIX SAS BP1118 FR-78370 PLAISIR




Tel. (+33) (0) 972 11 00 03 Fax (+33) (0) 972 11 00 03 www.direct-mesure.fr contact@direct-mesure.fr
N° TVA FR85418256814 RCS B 418 256 814 SIRET 418 256 814 00041



SPECIFICATIONS



Dimensions (Unit:mm)			
	FAC A/B/C Round type	FAP A/B/C Cup type	FAR A/B/C Cup type
Model	FAC A/B/C Round type	FAP A/B/C Cup type	FAR A/B/C Cup type
Switch	Micro switch	Micro switch	Micro switch
Float material	P.P.		
Cable spec	Neoprene Cable 1mm ² x3C or 2C	PVC Cable 1.25mm ² x3C or 2C	Neoprene Cable 1mm ² x3C or 2C
Contact rating	10A/ 250Vac (std.) or 15A/ 250Vac		
Contact form	N.O or N.C or SPDT		
Operating temp.	-10°C~80°C	0°C~60°C	-10°C~80°C
Specific gravity	0.6	0.6	0.6
Weight approx.	770g/5M	290g/1M	290g/1M
Pressure	2 kg/cm ²	2 kg/cm ²	2 kg/cm ²
Wire voltage	600 Vac	600 Vac	600 Vac
Isolation resistance	Min 100 M W		
Contact resistance	Max. 100m W+(70m W/m)		
Actuation angle	28 BA2B	28 BA2B	28 BA2B
Protection	IP68	IP68	IP68

TELEMETRIX est distributeur officiel **FINETEK** leader mondial de la mesure de niveau
TELEMETRIX SAS BP1118 FR-78370 PLAISIR

Tel. (+33) (0) 972 11 00 03 Fax (+33) (0) 972 11 00 03 www.direct-mesure.fr contact@direct-mesure.fr
N° TVA FR85418256814 RCS B 418 256 814 SIRET 418 256 814 00041

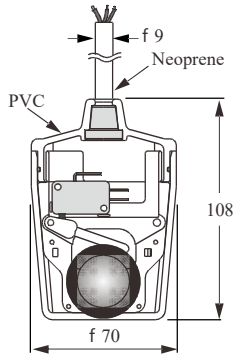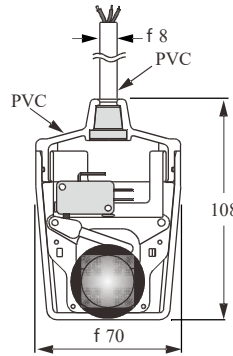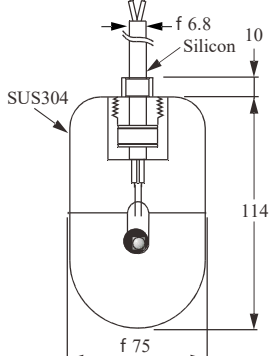
Dimensions (Unit:mm)				
	Model	FAD A/B/C Cup type	FAE A/B/C Cup type	FAS A/B/C Metal type
	Switch	Micro switch	Micro switch	Mercury switch
	Float material	PVC		SUS304
	Cable spec	Neoprene Cable 1mm ² x3C or 2C	PVC Cable 1.25mm ² x3C or 2C	Silicon Cable 0.75mm ² x3C or 2C
Contact rating	10A/ 250Vac (std.) or 15A/ 250Vac		1A/ 230Vac	
Contact form	N.O or N.C or SPDT		N.O or N.C or SPDT	
Operating temp.	0℃~60℃	0℃~60℃	0℃~170℃	
Specific gravity	0.6	0.6	0.5	
Weight approx.	290g/1M	290g/1M	480g/5M	
Pressure	2 kg/cm ²	2 kg/cm ²	2 kg/cm ²	
Wire voltage	600 Vac	600 Vac	300 Vac	
Isolation resistance	Min 100 M W		—————	
Contact resistance	Max. 100m W+(70m W/m)		Max.1 W+(70m W/m)	
Actuation angle	28 BA2B	28 BA2B	10 BA2B	
Protection	IP68	IP68	IP68	

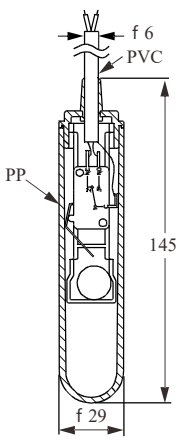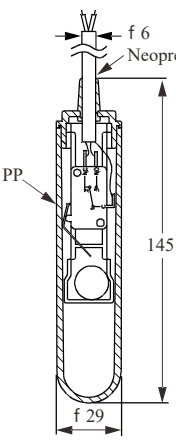Dimensions (Unit:mm)		
		
Model	FAL A/B/C Bar type	FAM A/B/C Bar type
Switch	Micro switch	
Float material	P.P.	
Cable spec	PVC Cable 0.75mm ² x3C	Neoprene Cable 0.75mm ² x3C
Contact rating	3A/ 125/250Vac	
Contact mode	N.O or N.C or SPDT	
Operating temp.	-0°C~60°C	-10°C~80°C
Specific gravity	0.8	
Weight approx.	113A 2g/1M Cable	
Pressure	4.5 kg/cm ²	
Wire voltage	600 Vac	
Isolation resistance	Min 100 M W	
Contact resistance	Max. 100m W+(70m W/m)	
Actuation angle	Up 18BA4B Down 3BA3B	
Protection	IP68	

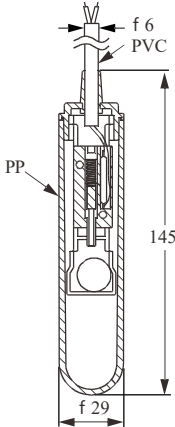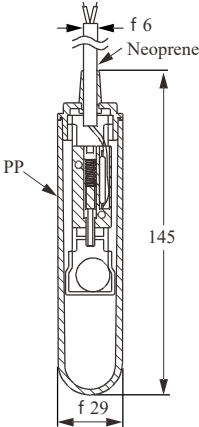
Dimensions (Unit:mm)		
		
Model	FAJ A/B/C Bar type	FAK A/B/C Bar type
Switch	Reed Switch	
Float material	P.P.	
Cable spec	PVC Cable 0.75mm ² x3C	Neoprene Cable 0.75mm ² x3C
Contact rating	AC70 VA / DC50 W(N.O), 20W(N.C, SPDT)	
Contact mode	N.O or N.C or SPDT	
Operating temp.	-0°C~60°C	-10°C~80°C
Specific gravity	0.8	
Weight approx.	115A 2g/1M Cable	
Pressure	4.5 kg/cm ²	
Wire voltage	300 Vac/ 350Vdc(N.O), 150 Vac/ 200Vdc(N.C, SPDT)	
Isolation resistance	Min 100MW	
Contact resistance	(N.O) Max.100mW+(70mW/m),(N.C,SPDT) Max.150mW+(70mW/m)	
Actuation angle	Up 18BA4B Down 3BA3B	
Protection	IP68	

WEIGHTS DIMENSIONS


**FAPW-03
FAPW-05**



FASW



FAB-0010

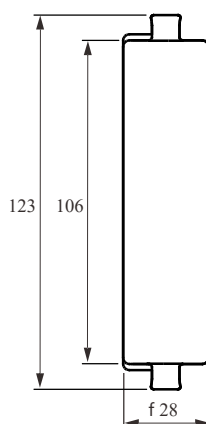


Model	Material	Weight
FAPW-03 FAPW-05	PP	0.3kg 0.5kg
FASW	SUS304	1.8kg
FAB-0010	PP	0.15kg


CONTACT MODE

1. SPST (N.O)


FACA




FAPA/FAEA



FARA/FADA




FASA




2. SPST (N.C)


FACB




FAPB/FAEB



FARB/FADB




FASB




3. SPDT (1C)


FACC




FAPC/FAEC



FARC/FADC



FASC



TELEMETRIX est distributeur officiel **FINETEK** leader mondial de la mesure de niveau



TELEMETRIX SAS BP1118 FR-78370 PLAISIR

Tel. (+33) (0) 972 11 00 03 Fax (+33) (0) 972 11 00 03 www.direct-mesure.fr contact@direct-mesure.fr
N° TVA FR85418256814 RCS B 418 256 814 SIRET 418 256 814 00041

WIRING



Micro Switch

When the float hasn't contacted the liquid, the blue and black wires are in an open state and the contact mode will be NC. When the liquid level rises and lifts the float until it reaches the actuation angle, the brown and black wires will be in an open state and the contact mode will be NO.

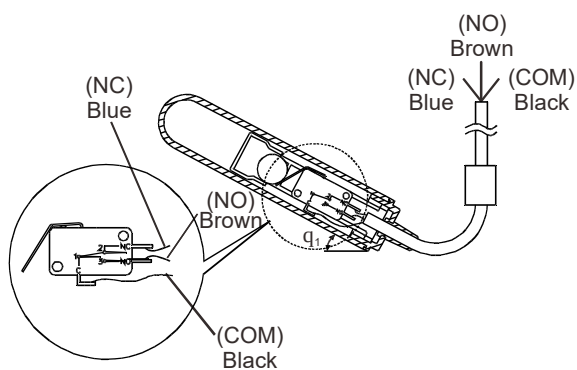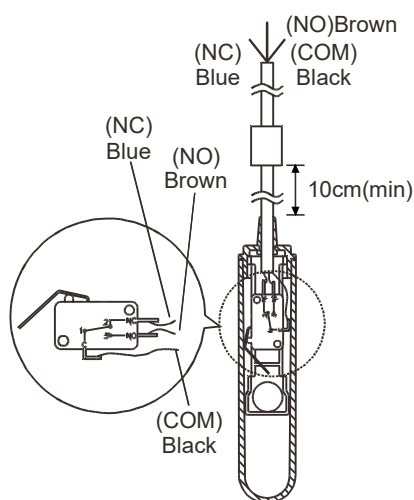

Reed Switch

When the liquid level is low, the metal ball remains away from the sensing range and the brown and black wires are in an open state (NC mode). When the liquid level rises and lifts the float until it reaches the actuation angle, the brown and black wires will be in an open state (NO mode).

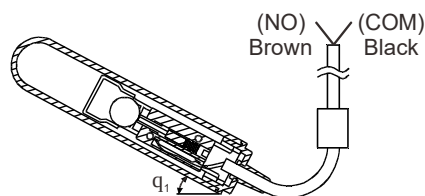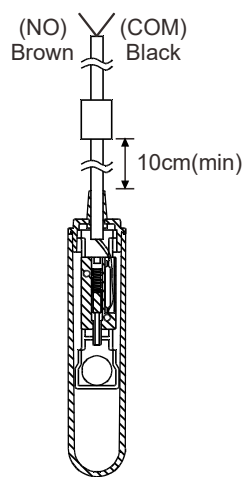


INSTALLATION GUIDE

DIMENSIONS

The float's action length (a) must be shorter than the distance between the wall and the cable (A) ; if not, it will not function accurately.



The lowest float level (d) must be higher than the lowest water level of the pump (D).

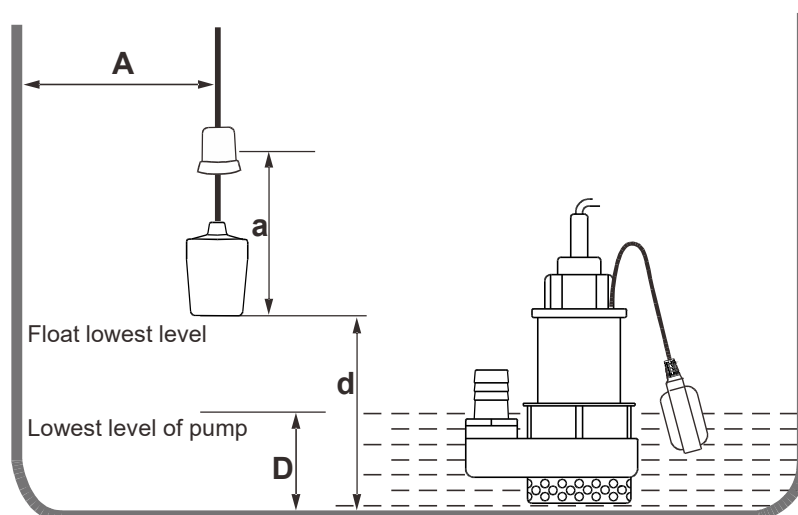

PRECAUTIONS

Keep a proper distance between the installation position and the water pump inlet to prevent the float switch from being sucked in towards the pump.

There should be a proper distance between the installation position and water inlet to prevent any direct water impact. If it can't be avoided, please install a pipe-shield or plate that lowers the turbulence.

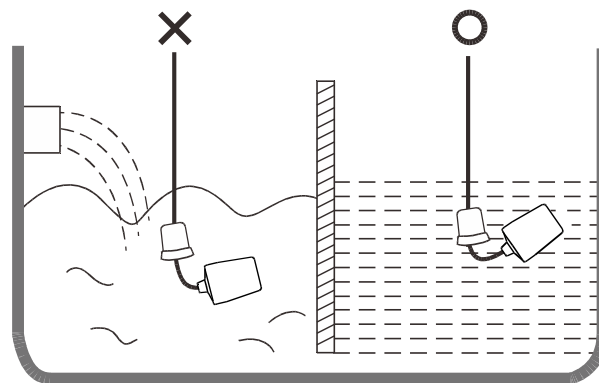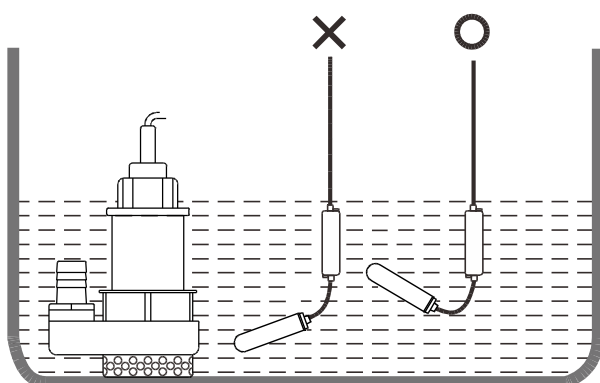


TELEMETRIX est distributeur officiel **FINETEK** leader mondial de la mesure de niveau
TELEMETRIX SAS BP1118 FR-78370 PLAISIR

Tel. (+33) (0) 972 11 00 03 Fax (+33) (0) 972 11 00 03 www.direct-mesure.fr contact@direct-mesure.fr
N° TVA FR85418256814 RCS B 418 256 814 SIRET 418 256 814 00041

APPLICATION

The FBX type is suitable for installation from the tank's roof/top for level control and monitoring.

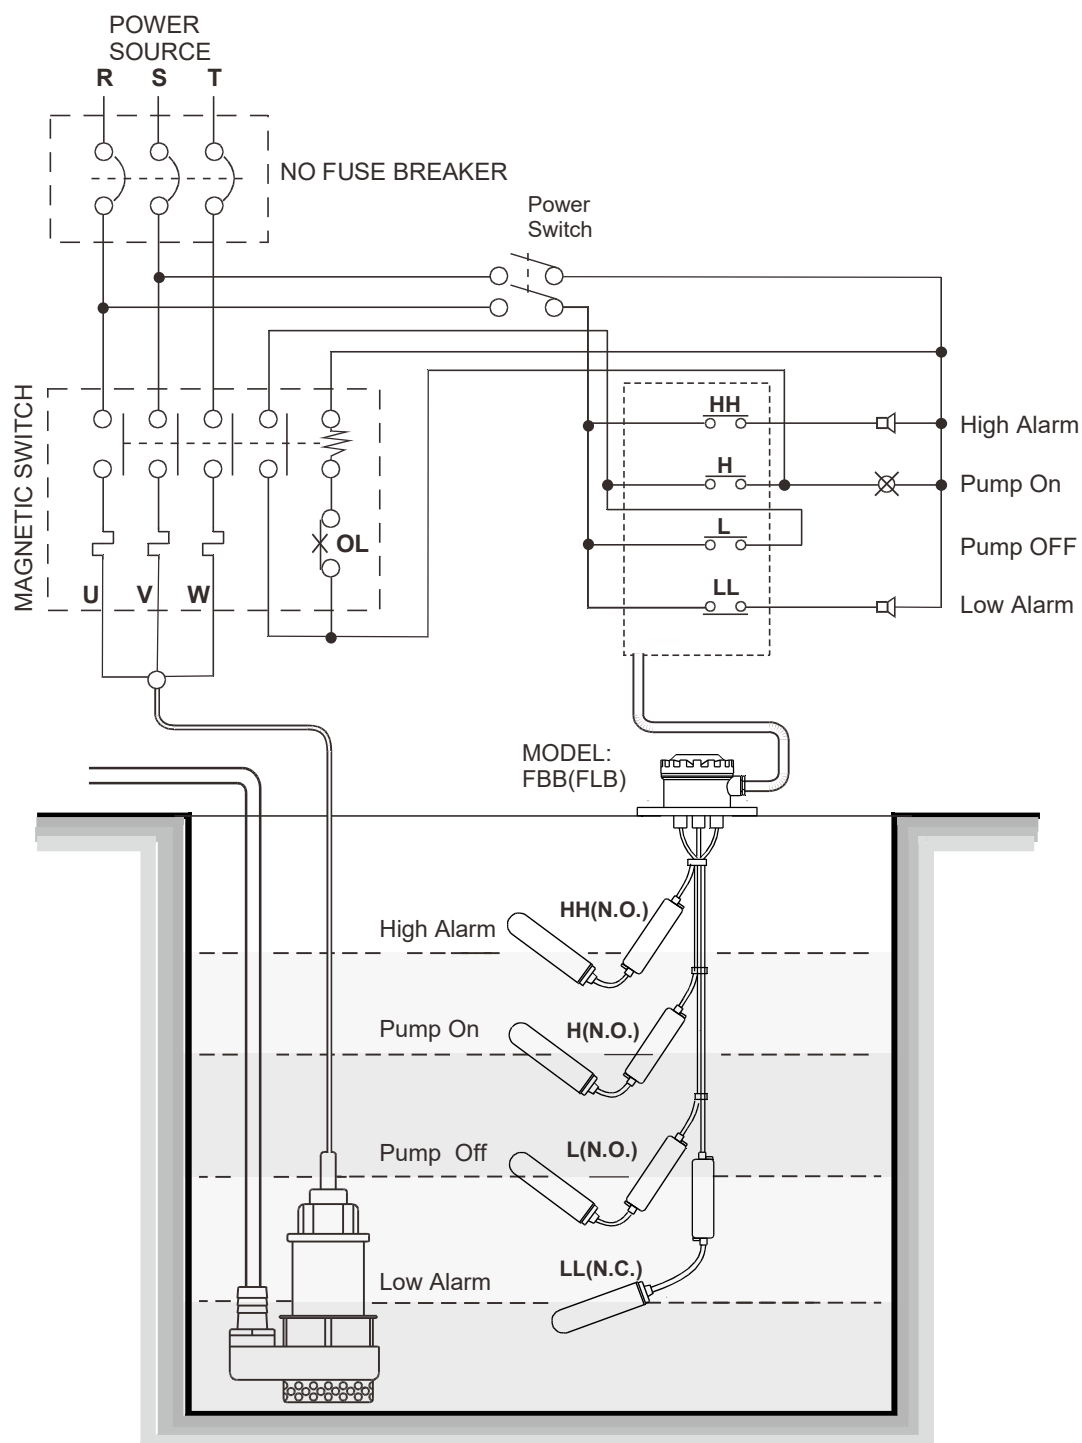

TELEMETRIX est distributeur officiel **FINETEK** leader mondial de la mesure de niveau

TELEMETRIX SAS BP1118 FR-78370 PLAISIR

Tel. (+33) (0) 972 11 00 03 Fax (+33) (0) 972 11 00 03 www.direct-mesure.fr contact@direct-mesure.fr
N° TVA FR85418256814 RCS B 418 256 814 SIRET 418 256 814 00041

MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
FAC	FAX10100-AD□P1
FACA	FAX10100-ADAP1
FACB	FAX10100-ADBP1
FACC	FAX10100-ADCP1

FAP	FAX10100-BD□P2
FAPA	FAX10100-BDAP2
FAPB	FAX10100-BDBP2
FAPC	FAX10100-BDCP2
FAR	FAX10100-BD□P1
FARA	FAX10100-BDAP1
FARB	FAX10100-BDBP1
FARC	FAX10100-BDCP1
FAD	FAX10100-BD□C1
FADA	FAX10100-BDAC1
FADB	FAX10100-BDBC1
FADC	FAX10100-BDCC1
FAE	FAX10100-BD□C2
FAEA	FAX10100-BDAC2
FAEB	FAX10100-BDBC2
FAEC	FAX10100-BDCC2

FAS	FAX10100-DA□M3
FASA	FAX10100-DAAM3
FASB	FAX10100-DABM3
FASC	FAX10100-DACM3

FAL	FAX10100-CB□P2
FAM	FAX10100-CB□P1
FAJ	FAX10100-CF□P2
FAK	FAX10100-CF□P1

FAPW-03	FAX□M1P-1806007002
FAPW-05	FAX□M1P-1806007003
FASW	FAX□M1P-MA06509501
FAB-0010	FAX□M1P-1802810601

ORDER INFORMATION

FAX 1 0 1 0 0 -^{09 10 11 12 13 14 15 16 17}999999999

^{09 10} Float type and switch

AD : f 90*110 Micro switch(10A)
 AE : f 90*110 Micro switch(15A)
 BD : f 70*108 Micro switch(10A)
 BE : f 70*108 Micro switch(15A)
 CB : f 29*145 Micro switch(3A)
 CC : f 29*145 Micro switch(3A)+Ground
 CF: f 29*145 Reed Switch
 CG: f 29*145 Reed Switch+Ground
 DA: f 75*120 Mercury switch

※ It is suggested to apply Reed Switch contact models in PLC or DCS control.

¹¹ Contact mote

A: N.O.
 B: N.C.
 C: SPDT

^{12 13} Float and cable material

P1 : Float PP Neoprene cable
 P2: Float PP PVC cable
 C1: Float PVC Neoprene cable
 C2: Float PVC PVC cable
 M3: Float SUS304 Silicon cable

^{14 15 16 17} Length

Code	Length
0600	600mm (Min imum order length)
3000	3000mm
5000	5000mm
A100	10000mm ("A" Multiply 100 times)
A150	15000mm ("A" Multiply 100 times)
A450	45000mm (Maximam order length)

TELEMETRIX est distributeur officiel **FINETEK** leader mondial de la mesure de niveau
TELEMETRIX SAS BP1118 FR-78370 PLAISIR

Tel. (+33) (0) 972 11 00 03 Fax (+33) (0) 972 11 00 03 www.direct-mesure.fr contact@direct-mesure.fr
 N° TVA FR85418256814 RCS B 418 256 814 SIRET 418 256 814 00041

HOW TO ORDER CABLE FLOATS (FB TYPE)

Various types of multi-point products can be selected to meet the user's needs.

For example:


FBX10000-99999 C type is suitable for corrosive solutions.

FBX10000-99999 B type is suitable for high-temperature waste water


DISTANCE OF CONTROL POINTS

		NO	NC
$\ell 1$: ____	mm	☐	☐
$\ell 2$: ____	mm	☐	☐
$\ell 3$: ____	mm	☐	☐
$\ell 4$: ____	mm	☐	☐
L : ____mm			


MODEL: FBX10000-99999 B

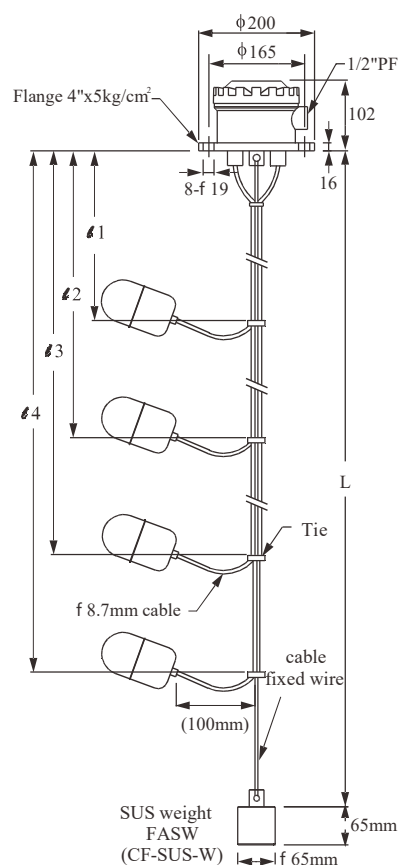

MODEL: FBX10000-99999 C

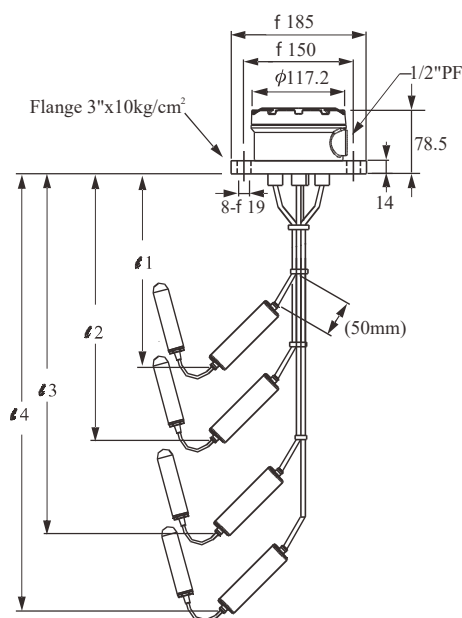

MODEL: FBX10000-99999 C

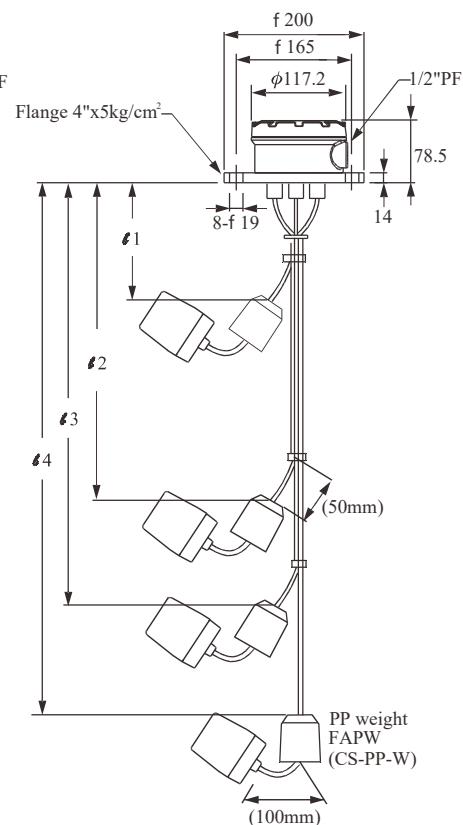

ORDER INFORMATION

FBX 1 0 0 0 0 - ⁰⁹9 ¹⁰9 ¹¹9 ¹²9 ¹³9 ¹⁴9 ¹⁵9 ¹⁶9 ¹⁷9 ¹⁸9 ¹⁹9 ²⁰9 ²¹9 ²²9 ²³9 ²⁴9 ²⁵9 ²⁶9 ²⁷9 ²⁸9 ²⁹9 9999

⁰⁹¹⁰ Float type and switch

AD: f 90*110 Micro switch(10A)
 AE: f 90*110 Micro switch(15A)
 BD: f 70*108 Micro switch(10A)
 BE: f 70*108 Micro switch(15A)
 CB: f 29*145 Micro switch(3A)
 CC : f 29*145 Micro switch(3A)+Ground
 CF: f 29*145 Reed Switch
 CG: f 29*145 Reed Switch+Ground
 DA: f 75*120 Mercury switch

※ It is suggested to apply Reed Switch contact models in PLC or DCS control.

¹¹ Contact mote

A: N.O.
 B: N.C.
 C: SPDT

¹²¹³ Float and cable material

P1: PP Float Neoprene Neoprene cable
 P2: PP Float PVC cable
 C1: PVC Float Neoprene Neoprene cable
 C2: PVC Float PVC cable
 M3: SUS304 Float Neoprene cable

¹⁴ Housing

B: B type Housing aluminum
 C: C type Housing plastic (PP)
 double into the line mouth 1/2"PF f 117.2X64.5

Connection

¹⁵¹⁶

AK: JIS-FF
 AN: ANSI-RF
 AS: DIN-FF

¹⁷¹⁸

B5: 3"
 B6: 3-1/2"
 B7: 4"
 E4: DN80
 E5: DN100

¹⁹²⁰

40: 5 kg/cm²
 42: 10 kg/cm²
 48: 150 Lbs
 49: 300 Lbs
 57: PN10
 58: PN16

(Next page)

TELEMETRIX est distributeur officiel **FINETEK** leader mondial de la mesure de niveau

TELEMETRIX SAS BP1118 FR-78370 PLAISIR

Tel. (+33) (0) 972 11 00 03 Fax (+33) (0) 972 11 00 03 www.direct-mesure.fr contact@direct-mesure.fr
 N° TVA FR85418256814 RCS B 418 256 814 SIRET 418 256 814 00041

⑨
⑩
⑪
⑫
⑬
⑭
⑮
⑯
⑰
⑱
⑲
⑳
㉑
㉒
㉓
㉔
㉕
㉖
㉗
㉘
㉙

FBX 1 0 0 0 0 - 99999999999999999999 9999

㉑ ㉒ Flange material

MA: SUS304
 MB: SUS316
 18 : PP

㉓ ㉔ Float with weight quantity

Code	Float with weight quantity×Quantity	Code	Float with weight quantity×Quantity
P1	Float plastic with weight PP(0.3kg)×1	Q1	Float plastic with weight PP(0.5kg)×1
P2	Float plastic with weight PP(0.3kg)×2	Q2	Float plastic with weight PP(0.5kg)×2
P3	Float plastic with weight PP(0.3kg)×3	Q3	Float plastic with weight PP(0.5kg)×3
P4	Float plastic with weight PP(0.3kg)×4	Q4	Float plastic with weight PP(0.5kg)×4
P5	Float plastic with weight PP(0.3kg)×5	Q5	Float plastic with weight PP(0.5kg)×5
P6	Float plastic with weight PP(0.3kg)×6	Q6	Float plastic with weight PP(0.5kg)×6
R1	Float plastic with weight PP(0.15kg)×1	S1	SUS304 Float(without weight)×1
R2	Float plastic with weight PP(0.15kg)×2	S2	SUS304 Float(without weight)×2
R3	Float plastic with weight PP(0.15kg)×3	S3	SUS304 Float(without weight)×3
R4	Float plastic with weight PP(0.15kg)×4	S4	SUS304 Float(without weight)×4
R5	Float plastic with weight PP(0.15kg)×5	S5	SUS304 Float(without weight)×5
R6	Float plastic with weight PP(0.15kg)×6	S6	SUS304 Float(without weight)×6

㉕ Weight (bottom)


0: None
 S: Weight SUS304 (1.8kg) with cable
 N: Weight PP (0.3kg) with nylon cable
 M: Weight PP (0.5kg) with nylon cable

㉖ ㉗ ㉘ ㉙ Length

Code	Length
0600	600mm (Min imum order length)
3000	3000mm
5000	5000mm
A100	10000mm ("A" Multiply 100 times)
A150	15000mm ("A" Multiply 100 times)
A450	45000mm (Maximam order length)

EXAMPLES-OF-TANK-MOUNTING

- [FC/FD] Mini Float/Magnetic Float Level Switch
- [FG] Magnetic Float Level Transmitter
- [FF] Side Mounting Float Switch
- [FA/FB] Cable Float Level Switch
- [SP] Thermal Dispersion Flow Switch
- [SF] Paddle Flow Switch
- [SD] Optical Level Switch
- [SE] Rotary Paddle Level Switch
- [SA] Capacitance Level Switch
- [EC] Pressure Level Transmitter
- [SC] Vibrating Probe Level Switch
- [SC] Tuning Fork Level Switch
- [EB] RF-Capacitance Level Transmitter
- [SB] RF-Capacitance / Admittance Level Switch
- [EG] Magnetostrictive Level Transmitter
- [EF] By-Pass Level Transmitter
- [MEF] Mini By-Pass Level Transmitter
- [EA] Ultrasonic Level Transmitter
- [JFR] FMCW Radar Level Transmitter
- [EE] Electromechanical Level Measuring System
- [ED] Speed Monitor
- [SRT/SRS] Conveyor Belt Misalignment Switch & Safety Cable Pull Switch
- [PB/PM] Microprocessor Based Bargraphic Display Scaling Meter
- [BRD/AE] Valve and Controller for Dust Collector System
- [BAS/BAH/BVP] Air Hammer
- [BVK/BVR/BVT] Pneumatic Vibrator

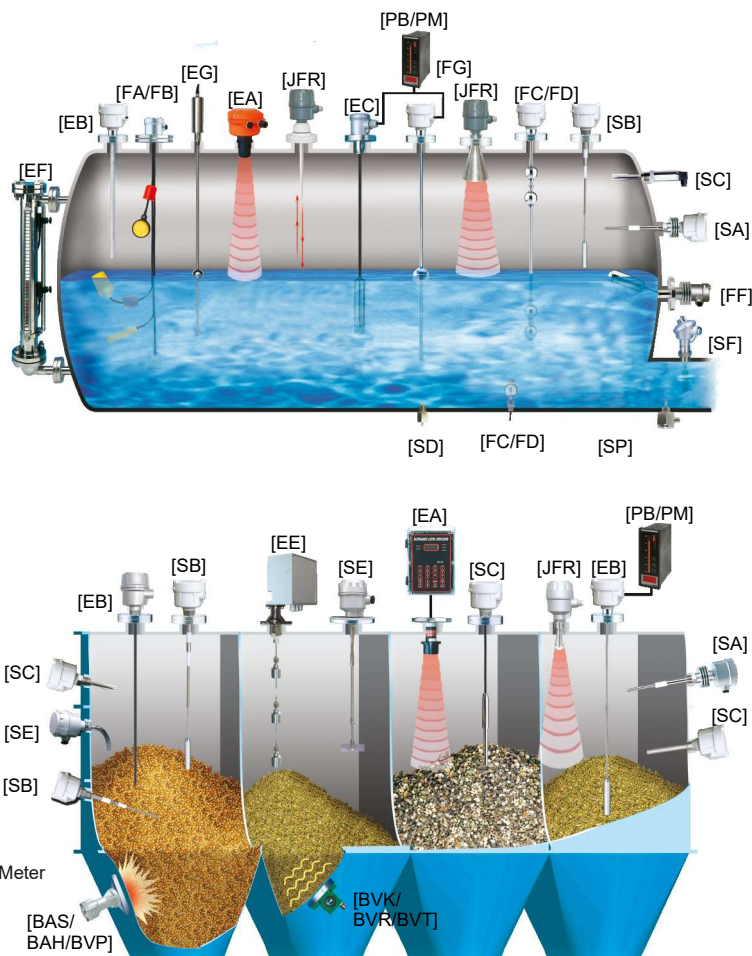

DIRECT-MESURE est une marque de

TELEMETRIX SAS
7, RUE DU BOIS MALHAIS
FR-783640 SAINT-GERMAIN-DE-LA-GRNGE

Tel. (+33) (0) 972 11 00 03
Fax (+33) (0) 972 11 00 03
www.direct-mesure.fr
contact@direct-mesure.fr

N° TVA FR85418256814
RCS B 418 256 814
SIRET 418 256 814 00041



Distributor: